



Strength
For Tiles

- Tile Adhesive
- Tile Grout
- Epoxy Grout
- Tiles Cleaner
- Grout Admix
- Spacer & Leveler

Group of Company :





about us

LEXBOND is your one stop solution for everything related to Construction Chemicals, Epoxy, Adhesives, Admixtures, Sealers and other various application like grouting, fixing tilex, waterproofing, At LEXBOND we have implemented world class practices that ensure our products lasts long. Bid good bye to all your worries with regards to chemicals. Say hello to a worry free future, say hello to **LEXBOND CHEMTECH LLP**

TILES ADHESIVE

NSA-2G ◆

NSA-3G ◆

NSA-4G ◆

NSA-5G ◆

BLOCK JOINTING MORTAR ◆

TILES GROUT

Tiles Grout ◆

Grout Admixture ◆

SBR Latex ◆

TILES EPOXY

3 Part L-poxy ◆

2 Part L-poxy ◆

CEM BOND

Cem Bond LX +III ◆

TILES CARE

Tiles Cleaner ◆

TILES ACCESSORIES

Tiles Spacer ◆

Tiles Levling Kit ◆



FOR FIXING FLOOR TILES



**NSA-2G
TILES ADHESIVE**
Tile fixing adhesive for
Internal Floor applications.

PACKING
20 kg

Color : GREY

NSA-2G (type-1)

Tiling Solutions
Packing 20 Kg

Product Details
LEXBOND NSA-2G is a high polymer modified, cement-based tile adhesive which is suitable for fixing tiles. cement terrazzo, concrete floor, natural stones, vitrified tiles in interior and exterior floor areas.

Application Area
Applying For Flooring tile 24x24, 16x16, 12x12 parking Tiles

- Features**
- Excellent bond strength
 - No shrinkage
 - Easy to spread
 - Consistent in quality
 - Nil wastages
 - No curing required
 - Single component no hassles of mixing the ingredients.

Shelf life & storage
In unopened condition, the shelf life is 12 months from the date of manufacturing Store in a cool & dry place

| NSA-2G | |
|--------------------------------|-----------------------------|
| Bulk Density | 1400-1500 Kg/m ³ |
| Water Powder Ratio | 25% |
| Pot Life | 30 Min, |
| Open Time | 30 Min, |
| Adjustable Time | 30 Min, |
| Usage Time Post Application | 24 hrs |
| Compressive Strength @ 28 Days | 7-8 N/mm |
| Slip Resistance @ 20 Kg/sq.m. | 0 mm |
| Coverage @3mm Per Kg | 4 Sq. Ft. |
| Tensile Strength | >1450 N Force |
| Shear Adhesive Strength. M Pa | 8-10 |



FOR FIXING WALL & VITRIFIED TILES



NSA-3G TILES ADHESIVE

Tile fixing adhesive for
Internal Floor applications.

PACKING

20 kg

Color : **GREY**

NSA-3G (type-1)

Tiling Solutions
Packing 20 Kg

Product Details

LEXBOND NSA-3G (Grey) is a high polymer modified, adhesive for vitrified, granite on wall cladding and floor for internal & external use.

Application Area

Applying for Wall and Vitrified tiles for interior and exterior used (tile on tile 12x24, 800x800, High Depth Elevation, 600x1200mm upto 8 feet)

Features

- Excellent bond strength
- No shrinkage
- Easy to spread
- Consistent in quality
- Nil wastages
- No curing required
- Single component no hassles of mixing the ingredients.

Shelf life & storage

In unopened condition, the shelf life is 12 months from the date of manufacturing Store in a cool & dry place

| NSA-3G | |
|--------------------------------|-----------------------------|
| Bulk Density | 1400-1500 Kg/m ³ |
| Water Powder Ratio | 25% |
| Pot Life | 30 Min, |
| Open Time | 30 Min, |
| Adjustable Time | 30 Min, |
| Usage Time Post Application | 24 hrs |
| Compressive Strength @ 28 Days | 7-8 N/mm |
| Slip Resistance @ 20 Kg/sq.m. | 0 mm |
| Coverage @3mm Per Kg | 4 Sq. Ft. |
| Tensile Strength | >1450 N Force |
| Shear Adhesive Strength. M Pa | 8--10 |



For Fixing Vitrified tiles



NSA-4G TILES ADHESIVE

Tile fixing adhesive for
Internal Floor applications.

PACKING
20 kg

Color :
GREY
WHITE



NSA-4G (type-2)

Product Details

LEXBOND NSA-4G (Grey & white) is a high polymer modified, white cement based, high performance, high strength and high quality tile adhesive developed to fix glass mosaic, italian marble and special tiles, Suitable for both internal and external, thin bed applications.

Application Area

Applying for wall and vitrified tiles for exterior and interior used (800x800, 1000x1000, 800x1600 600x1200 up to 20 feet) Wooden Planks.

- ▶ Applying small size marble & granites on wall externally (up to 800x1200mm)

Features

- Excellent bond strength
- No shrinkage
- Easy to spread
- Consistent in quality
- Nil wastages
- No curing required
- Single component no hassles of mixing the ingredients.

Shelf life & storage

In unopened condition, the shelf life is 12 months from the date of manufacturing Store in a cool & dry place

| NSA-4G | |
|--------------------------------|-----------------------------|
| Bulk Density | 1400-1500 Kg/m ³ |
| Water Powder Ratio | 25% |
| Pot Life | 30 Min, |
| Open Time | 30 Min, |
| Adjustable Time | 30 Min, |
| Usage Time Post Application | 24 hrs |
| Compressive Strength @ 28 Days | 7-8 N/mm |
| Slip Resistance @ 20 Kg/sq.m. | 0 mm |
| Coverage @ 3mm Per Kg | 4 Sq. Ft. |
| Tensile Strength | >1450 N Force |
| Shear Adhesive Strength. M Pa | 8-10 |



For Fixing Marbles & Slabs



NSA-5G TILES ADHESIVE

Tile fixing adhesive for
Internal Floor applications.

PACKING
20 kg

Color : **GREY**
WHITE

NSA-5G (type-3)

Tiling Solutions
Packing 20 Kg

Product Details

LEXBOND NSA-5G is a high polymer modified, cement-based tile adhesive which is suitable for fixing tiles on concrete floor, natural stones, vitrified tiles in interior and exterior floor areas.

Application Area

Applying for wall and vitrified for interior and exterior used (1200x1800, 1200x1200, 1200x1600, 1200x1800, 800x2400, slabs) (600x1200 upto 30-40 feet)

Features


- Excellent bond strength
- No shrinkage
- Easy to spread
- Consistent in quality
- Nil wastages
- No curing required
- Single component no hassles of mixing the ingredients.

Shelf life & storage

In unopened condition, the shelf life is 12 months from the date of manufacturing. Store in a cool & dry place.

| NSA-5G | |
|--------------------------------|-----------------------------|
| Bulk Density | 1400-1500 Kg/m ³ |
| Water Powder Ratio | 25% |
| Pot Life | 30 Min, |
| Open Time | 30 Min, |
| Adjustable Time | 30 Min, |
| Usage Time Post Application | 24 hrs |
| Compressive Strength @ 28 Days | 7-8 N/mm |
| Slip Resistance @ 20 Kg/sq.m. | 0 mm |
| Coverage @3mm Per Kg | 4 Sq. Ft. |
| Tensile Strength | >1450 N Force |
| Shear Adhesive Strength. M Pa | 8-10 |

For Fixing Blocks

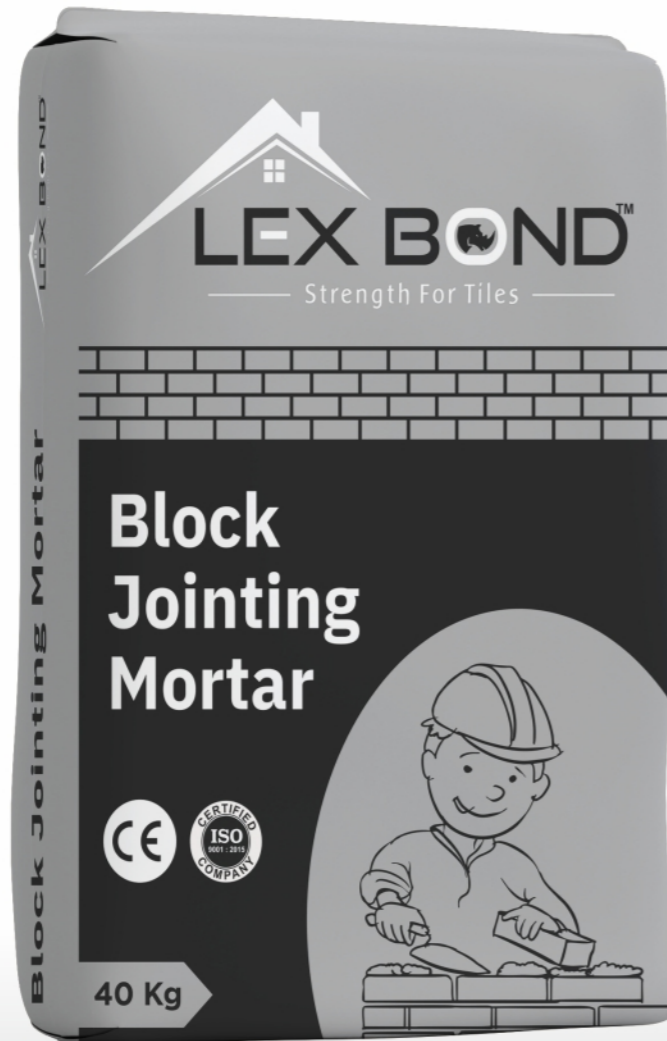

BLOCK JOINTING MORTAR

PACKING

40 kg

Color :

GREY



BLOCK JOINTING MORTAR

Description

LEXBOND is a non-refractory mortar, used for laying masonry units like AAC blocks. It is a self-curing mortar made from cement, selected fine sand and polymeric additives, which ensure good bonding and durable strength between the blocks.

Benefits

- For 4mm bed thickness
- Suitable for insulated blocks
- Block mounting full wall in 2-3 days
- The chiseling and conducting can be carried out after 14 days
- The Plastering can be carried out after 7 days
- Can be applied with 90% material transfer
- Self-curing adhesive



High Polymer Tile Grout



Tile Grout

One Pack Water Resistant
Tile Grout

PACKING

1 kg

PRODUCT DETAILS

LEXBOND Tile Grout is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tiles, natural stones, Vitrified tiles in interior and exterior situations. Consult LEXBOND Chemicals regarding use of a higher performance adhesive for applications in difficult and demanding situations.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

APPLICATION AREA

Wall | Floor | Interior & Exterior Dry Area Work Tops.

COLORS



White



Ivory



Grey



C. Brown



Magenta



R. Brown



Beige



Black



Jaisalmer



Terracotta



S. Blue



O.Green



Pink

Grout Admix



Grout Admix

For better strength of Grout

PACKING

200 ml



PRODUCT DETAILS

LEXBOND Admix is specially designed Latex Admix to be used with Sanded & Unsanded Grout

SHELF LIFE & STORAGE

It improves the performance of Portland cement grouts for all type of ceramic tile, brick, marble, natural stone and agglomerate stone installations

COLORS

- Colour-fastness
- Flexibility
- Compressive strength
- Shock and chemical resistant
- Reduces water absorption
- Easy to clean

COVERAGE

Varies as per application



SBR LATEX



SBR LATEX

For Waterproofing & Repairs

PACKING

1 Ltr.



APPLICATION AREA

For Enhances durability and lifespan of surfaces

PRODUCT DETAILS

SBR latex is a synthetic rubber emulsion that, when added to cement slurry, cement mortar, concrete, or grout, provides good adhesion and water resistance. It comes in the form of a milky liquid. It is fully soluble in water and is to be added directly to the gauging water of mortar, oncrete, or cementitious grout.

Packing

1 Ltr.

SHELFLIFE

LEXBOND SBR latex has a shelf life of 12 months if kept in a dry, unopened condition.

Epoxy 2 Part




Epoxy-2 Part

Stain free grout for
Floor & Wall (2 Part)

PACKING

1 kg / 5 Kg

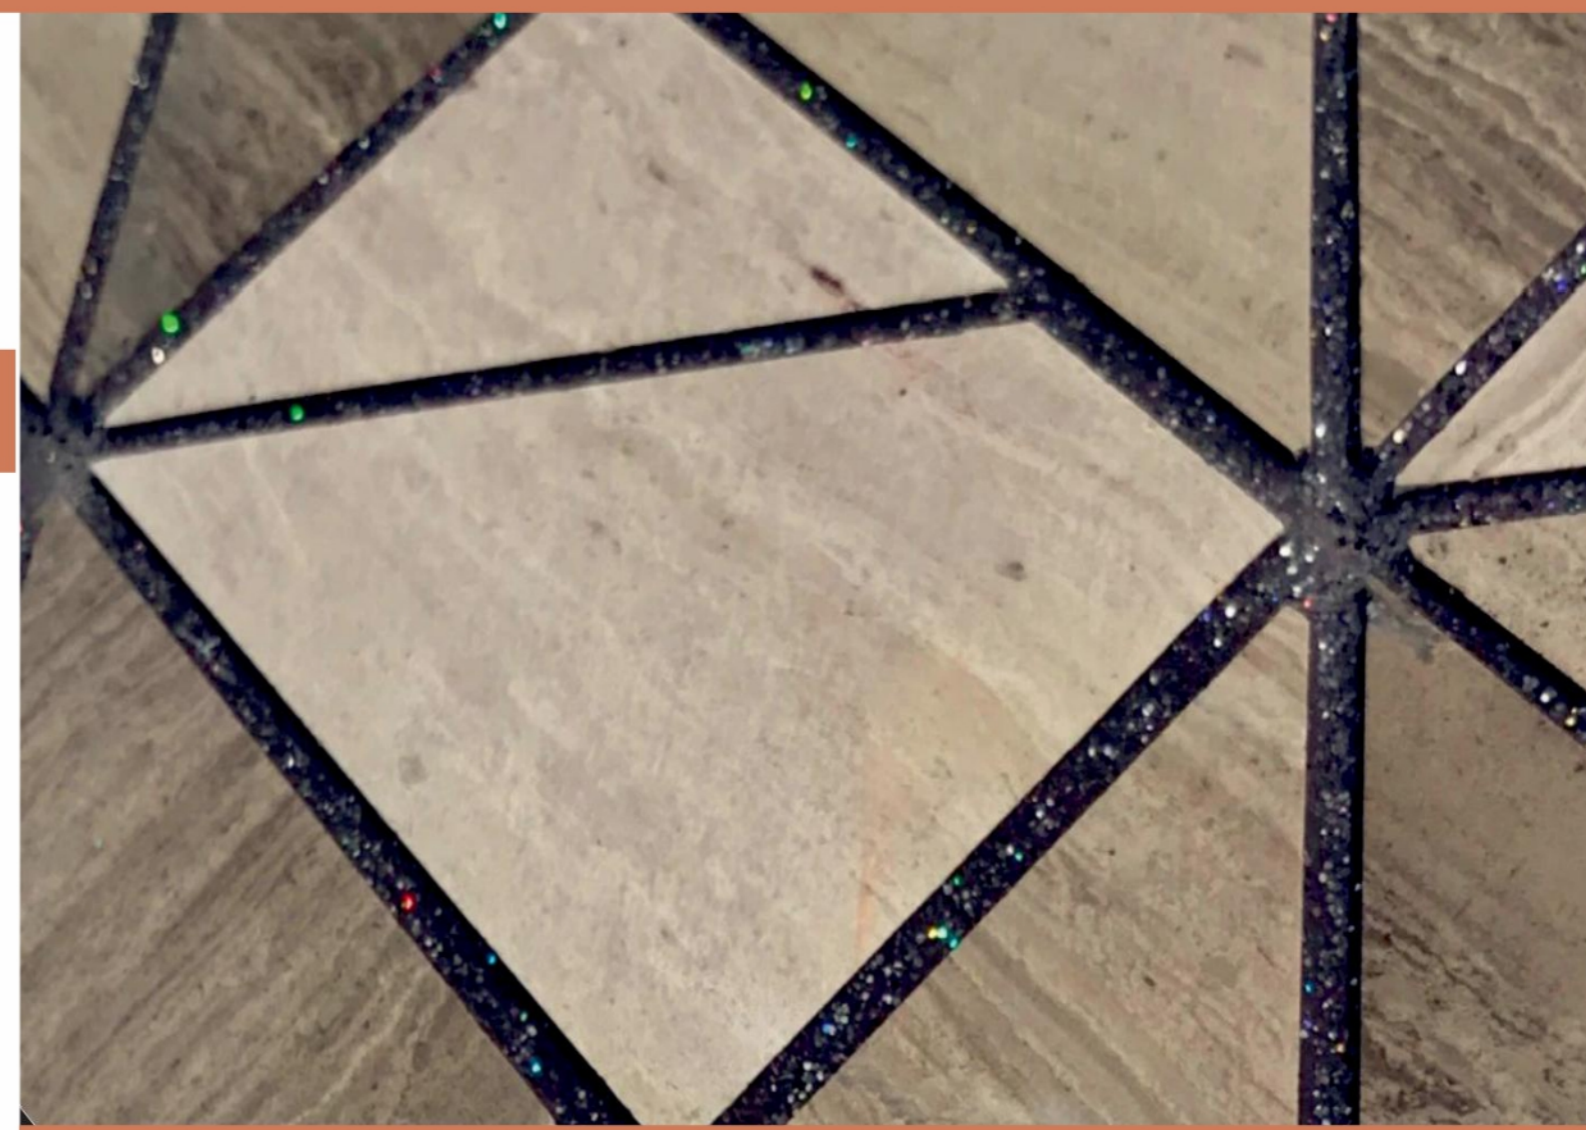

PRODUCT DETATILS

2 Part Epoxy easy is a two component, easy to use, epoxy based tile adhesive and grout. It is suitable for all types of tiles and stones on the floor and wall. It is especially recommended for hygiene sensitive areas and also areas which require sterile conditions.

USAGE

Anti-stain properties make it suitable for maintenance - free use in residential, commercial, & hospitality sector.

- High bond strength makes it suitable for use with ceramic tile, porcelian, and vitrified tiles, large format tiles & stones, low thickness slabs, natural stone, artificial stone, etc
- Low water absorption and resistance to a wide degree of temperature variation ensures that it can be used for wet areas, swimming pools, spas, jacuzzis, bathrooms, public toilets, and showers.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.



Epoxy 3 Part



Epoxy-3 Part

Stain free grout for Floor & Wall (3 Part)

PACKING

1 kg / 5 Kg



PRODUCT DETAILS

LEXBOND Epoxy is a hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs and does not permit the entry of bacteria or dirt. It is easily maintained in a sterile condition.

TECHNICAL SPECIFICATION

| Joint Width | Pot Life @27+-2C° | Cure @27+-2C° | Temperature Resistance | Water Absorption | Specific Gravity |
|--------------|-------------------|---------------|---------------------------------------|--------------------------------|------------------|
| 2-20mm | 45 minutes | 48 hours | Prolonged - 30C°to 150C° Intermittent | Nil(1) | 1.75 |
| | | | | Tensile Adhesion (14 days air) | |
| | | | | Dry condition | Wet condition |
| Epoxy Grout | | | | >4.5kn | >3.6kn |
| BS 5980:1980 | | | | 0.95 | 0.56 |

PACKAGING OF RAINBOW SPARKLE SERIES

| Kit | Filler | Resin | Hardener |
|-----|--------|--------|----------|
| 5kg | 3500gm | 1000ml | 500ml |
| 1kg | 700gm | 200ml | 100ml |

PACKAGING OF LEXBOND SERIES

| Kit | Filler | Resin | Hardener |
|-----|--------|--------|----------|
| 5kg | 3500gm | 1000ml | 500ml |
| 1kg | 700gm | 200ml | 100ml |

| | | SPARKLE SILVER | SPARKLE GOLD | SPARKLE COPPER |
|--------------------|----------------------|----------------------------------|--------------------------------|----------------------------------|
| 01 LX - WHITE | 15 LX - DARK GREY | 101 LX - SILVER BLACK | 201 LX - GOLD BLACK | 301 LX - COPPER BLACK |
| 02 LX - IVORY | 16 LX - APRICOT | 102 LX - SILVER BROWN | 202 LX - GOLD BROWN | 302 LX - COPPER BROWN |
| 03 LX - BLACK | 17 LX - DENIM | 103 LX - SILVER GREY | 203 LX - GOLD GREY | 303 LX - COPPER GREY |
| 04 LX - LIGHT GREY | 18 LX - SEPIA | 104 LX - SILVER BLUE | 204 LX - GOLD BLUE | 304 LX - GOLD BLUE |
| 05 LX - TERRACOTTA | 19 LX - SKY BLUE | 105 LX - SILVER RED | 205 LX - GOLD RED | 305 LX - COPPER RED |
| 06 LX - R. BROWN | 20 LX - LIGHT GREEN | 106 LX - SILVER GREEN | 206 LX - GOLD GREEN | 306 LX - COPPER GREEN |
| 07 LX - YELLOW | 21 LX - ANCHOR | 107 LX - SILVER MAJESTIC SUNRISE | 207 LX - GOLD MAJESTIC SUNRISE | 307 LX - COPPER MAJESTIC SUNRISE |
| 08 LX - BLUE | 22 LX - PEARL | 108 LX - SILVER CREAM | 208 LX - GOLD CREAM | 308 LX - COPPER CREAM |
| 09 LX - C. BROWN | 23 LX - DUST ROSE | 109 LX - SILVER SKY BLUE | 209 LX - GOLD SKY BLUE | 309 LX - COPPER SKY BLUE |
| 10 LX - PINK | 24 LX - NAVY BLUE | SPECIAL | | |
| 11 LX - BEIGE | 25 LX - BRONZE | 110 LX - LEXBOND SILVER | 210 LX - LEXBOND GOLD | 310 LX - LEXBOND COPPER |
| 12 LX - MAGENTA | 26 LX - PLATINUM | | | |
| 13 LX - O. GREEN | 27 LX - MUSHROOM | | | |
| 14 LX - BURGUNDY | 28 LX - NATURAL GREY | | | |

CEM BOND LX +111



CEM BOND LX +111

For Strength in your construction

PACKING

1 Ltr. / 5 Ltr.



CEM BOND LX +111

DISCRIPTION

LEXBOND CEM BOND LX+111 Is a specially formulated integral liquid waterproofing compound composed of surface active plasticising agents, polymers & additives. It is used as an additive for cement concrete, mortar & plasters. It makes concrete cohesive and prevents segregation.

SHELF LIFE

12 Months From Manufacturing Date

METHODS OF APPLICATION

- Charge Cement & Aggregates To Concrete Mixer As Per The Mix Design, Mix In Dry State For 1-2 Minutes
- Start Addition Of 75-80% Mixing Water & Mix For 2-3 Minutes.
- CEM BOND LX+111 Is Added As Per The Recommended Dosage Into The Remaining Mixing/gauging Water, Then Add To Cement To Concrete Mixer & Mix For Another 2 Minutes.
- Place The Concrete Or Apply Plaster, As Needed.
- Cure The Applied Mortar Or Concrete As Per Good Construction Practices.

DOSAGE

100 TO 300ML PER 50Kg. Bag of cement.



Tiles Cleaner

Powerful, Heavy Duty
Acid Based Cleaner

PACKING

1 Ltr.



■ Description

A powerful, heavy duty, acid - based cleaner for ceramic tiled floors and walls. TILE CLEANER is designed for removal of cement film residues, efflorescence and most oxide stains. It may also be used as general purpose cleaner on other acid resistant surface.

Note: Do not use on surfaces that are not resistant to acid such as marble/terrazzo.

■ Benefits

- Powerful formula
- Fast acting
- Easy to apply
- Removes cement film
- Removes residues, efflorescence and most oxide stains

■ Use

TILE CLEANER is used for interior and exterior ceramic tiled floors and walls.

Tiles Accessories




Tile Spacer

To Make Space Between Tiles.
Wall Tile, Floor Tiles, Etc...

Available Size :
2mm, 3mm, 4mm,
5mm, 6mm

Pack Size:
100 Pcs. / Pkt

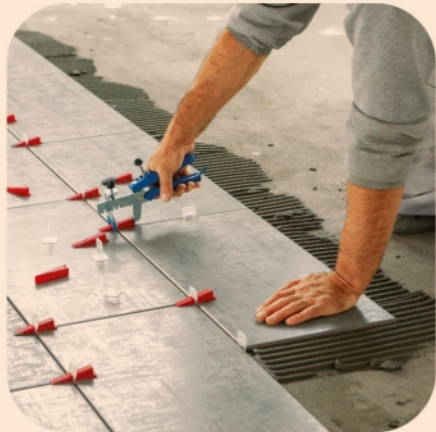


TILES EQUALIZER (LEVLAR KIT)

Tiles Leveling And Equalizing Surface.

Available Size :
2mm, 3mm, 4mm, 5mm

Pack Size:
clip - 50 Pcs. / Pkt, Wedges - 50 Pcs. / Pkt



Tile Lifters



Tile Leveling Tool



Trowel



Mfg. & Mkted.By:

LEXBOND CHEMTECH LLP

At. Morbi, Gujarat, INDIA.

Customer Care : +91-83200 20122

e: lexbondchemtechllp@gmail.com



Group of Company :

